



P R E S S U R E
T E M P E R A T U R E
L E V E L
I N S T R U M E N T A T I O N
F L O W
A N A L Y T I C A L

Holland[®]
APPLIED TECHNOLOGIES
Indianapolis • Chicago • San Juan
www.hollandapt.com
800-800-8464

Autoclaveable Pressure Transmitter

- *Compact low profile design*
- *Output remains stable through repeated autoclave cycles*
- *Rated NEMA 4X & 6P, IP67 & 69k*

Anderson's Autoclaveable HA Sanitary Pressure Transmitter is specifically designed for critical measurements in fractional size lines. Developed from the highly stable "Mini" HA Pressure Transmitter, the Autoclaveable HA takes the versatility of a small form factor transmitter to the next level by withstanding the stress of the autoclave environment. Its one-piece stainless steel package design incorporates a transducer and electronic circuitry to convert pressure and/or vacuum to a proportional 4-20 mA signal.


The product can be ordered with 1-1/2" Tri-Clamp[®] connection or our CPM fitting that eliminates hold-up volumes in process lines. All units are supplied factory calibrated to standard or custom ranges. For field maintenance, non-interactive zero, and span

adjustments, as well as easily accessible test points that greatly simplify calibration and validation. 316 "L" stainless steel wetted parts are electro-polished to an $R_a = 8$. Finally, since it's an Anderson "Pharmaceutical Series" product, every transmitter includes calibration and material certificates and permanent tag at no charge.

Complete specifications and ordering information are available on the reverse. For more information please visit our Web Site at www.andinst.com, or contact your local Authorized Anderson Distributor.



Complete Product Ordering Matrix

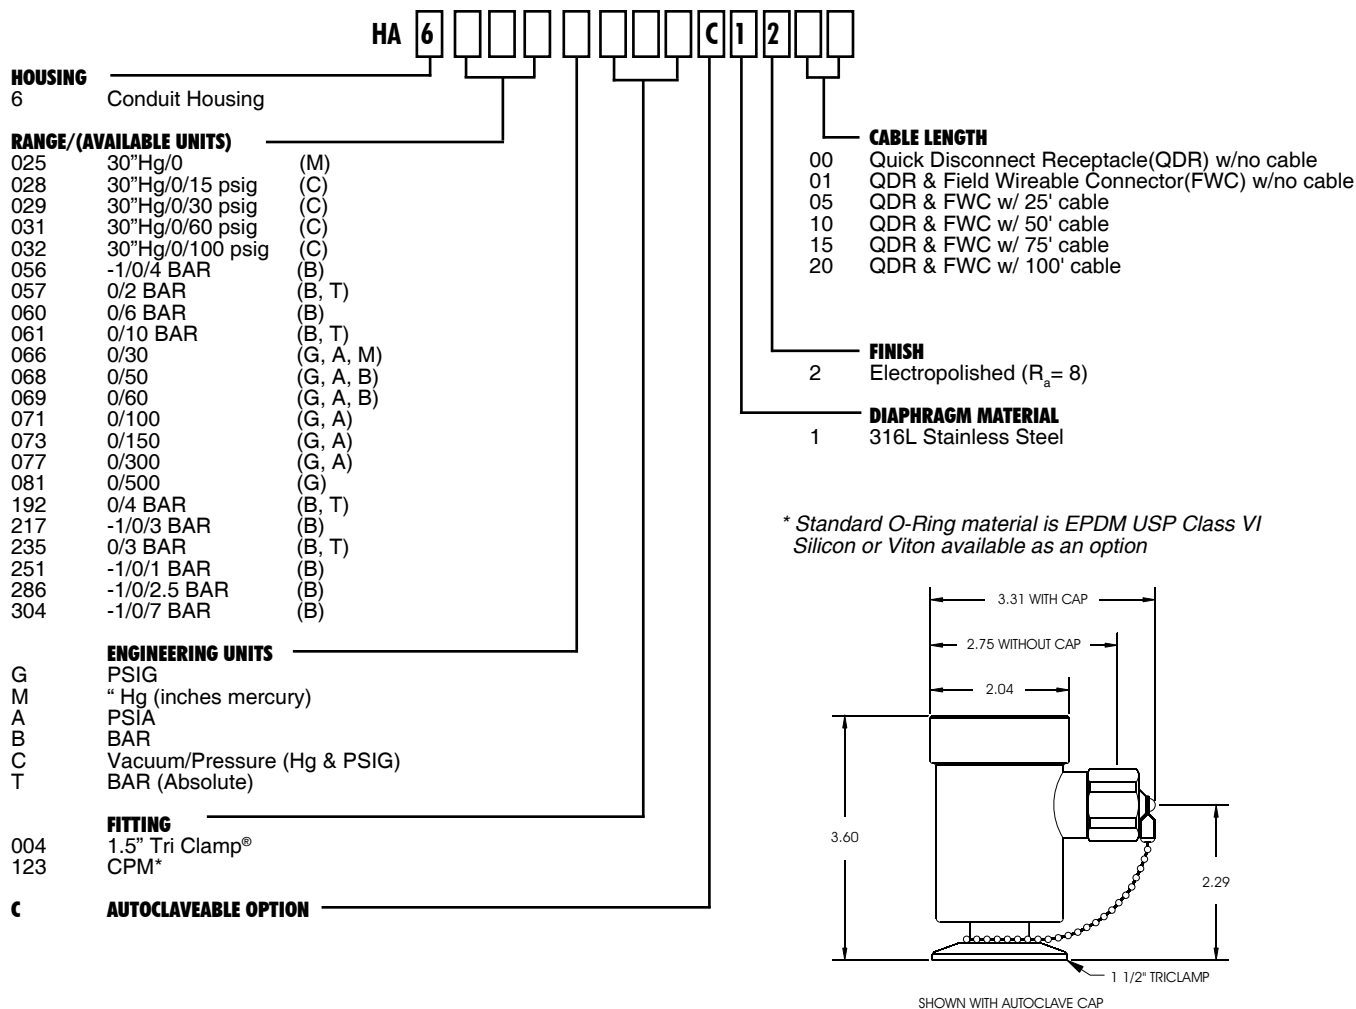

Specifications

Excitation:	10-40 VDC (Absolute), 24 VDC Nominal regulated or unregulated	Ambient Temperature Limits:	-18°C to 49°C (0°F to 120°F)
Output:	4-20 mA DC, 2 wire with non-interrupting circuit verification test points	Storage Temperature:	-40°C to 65°C (-40°F to 149°F)
Loop Resistance:	0-700 ohms at 24 VDC	Over-Range Rating:	2 times base range
Wiring Connection:	5pin M12 Quick Disconnect Receptacle	Response Time:	200 uSec
Recommended Cable:	22-24 AWG, foil shielded, and PVC coated. (3/16 - 1/4 OD insulation)	Wetted Parts:	316L stainless steel electropolished (R_a max. = 8 microinches, .2 microns)
Accuracy:	± 0.4% of full scale	Housing Material:	304 stainless steel
Repeatability:	± 0.2% of full scale	Zero and Span Adjustments:	± 10% of range
Hysteresis:	± 0.10% of full scale	Mounting:	Direct connection
Linearity:	±0.10% of full scale	Electrical Ratings:	Intrinsically safe for use in Class 1, Div. 1, Groups A-D; CE
Stability:	±0.15% of calibrated range for 6 months or 30 Autoclave cycles	Compliant:	(EMC Industrial Locations)
Effect of Temperature Change:	± 0.1 psig/5.5°C (10°F) typical	Standards:	Designed and manufactured to sound engineering practices in accordance with Article 3.3 of the PED 97/23/EC
Max. Autoclave Temperature:	124°C (255°F) for 1 hour		NEMA 4X & 6P
Process Temperature Limits:	-1°C to 149°C (30°F to 300°F) (Horizontal Mount recommended over 135°C (275°F))		IP67 & 69k
			CSA B51-03
			CRN# CSA0F9754.5C